








**TRANSFORMER BOBBIN INDUSTRIAL CO.,LTD.**



Tel : 86-769-88789999 Fax : 86-769-88789989  
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

**REVISIONS**

| REV | SYM | DRAFTER | CHECKER | DATE     |
|-----|-----|---------|---------|----------|
| 4   |     | T.S.LII | W.H.HSU | 06/02/03 |
| 5   |     | T.S.LII | W.H.HSU | 07/24/06 |
| 6   |     | T.S.LII | W.H.HSU | 04/02/07 |

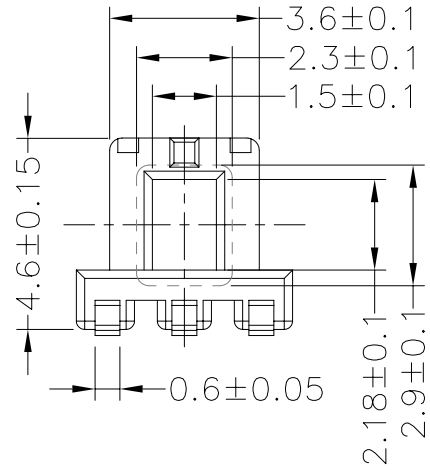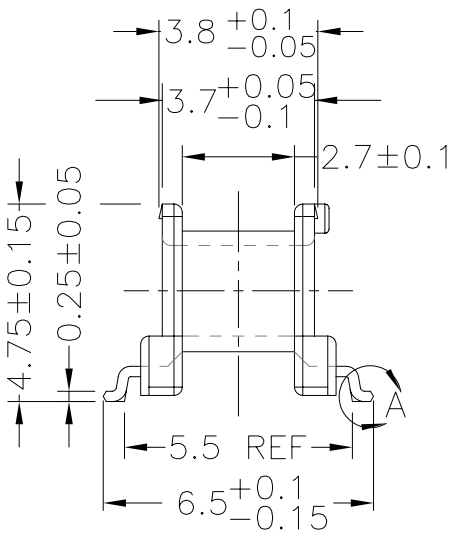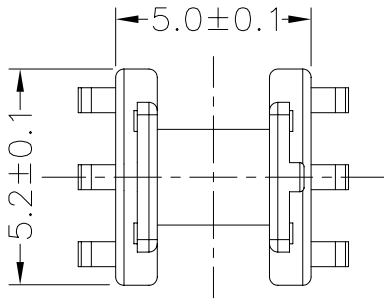

**DETAIL:A PATENTED**

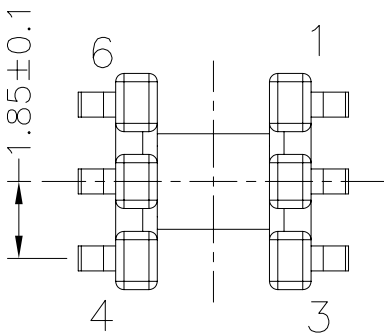

|                   |                      |                     |                    |                  |      |
|-------------------|----------------------|---------------------|--------------------|------------------|------|
| DWG NO.           | EE5.0-6P-GW-1.85-D-1 |                     |                    |                  |      |
| PART NO.          | MATERIAL (BOBBIN)    | MATERIAL (TERMINAL) | TERMINAL (PLATING) | PIN ALLOCATION   | NOTE |
| TBI-101-01041.103 | PM-9630              | P.B                 | Sn                 | ALL PIN          |      |
| TBI-101-01041.113 | PM-9630              | P.B                 | Sn                 | Pin cut No.2 , 5 |      |
|                   |                      |                     |                    |                  |      |
|                   |                      |                     |                    |                  |      |
|                   |                      |                     |                    |                  |      |
|                   |                      |                     |                    |                  |      |

TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05 UNIT : m / m SCALE 5.5 : 1

Finish: 1. Pb wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μ m (200 μ inches) min,Base nickel 0.625 μ m (25 μ inches) min.  
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μ m (200 μ inches) min.  
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 6