










TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
△3		YAN.TANG	G.F.YANG	04/09/08
△4		YAN.TANG	G.F.YANG	05/12/08
△5		YAN.TANG	G.F.YANG	06/04/08

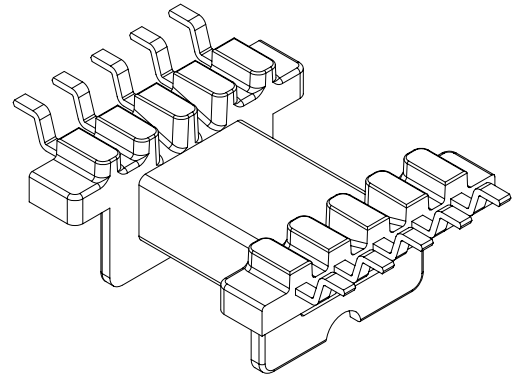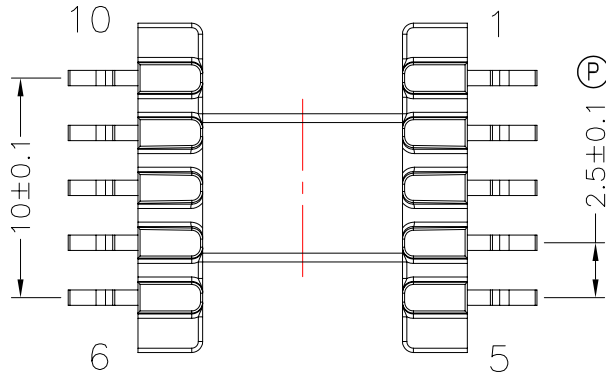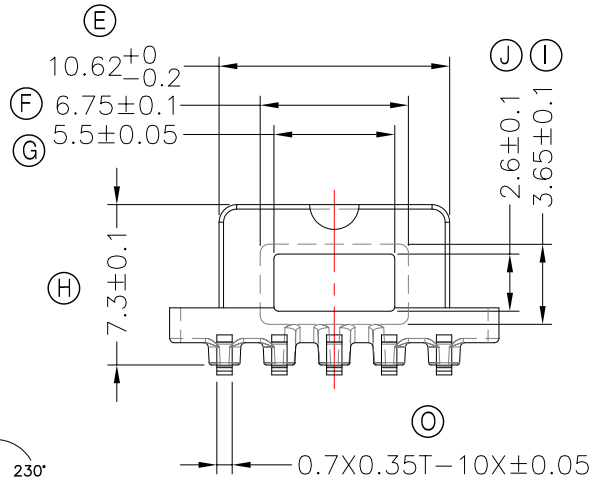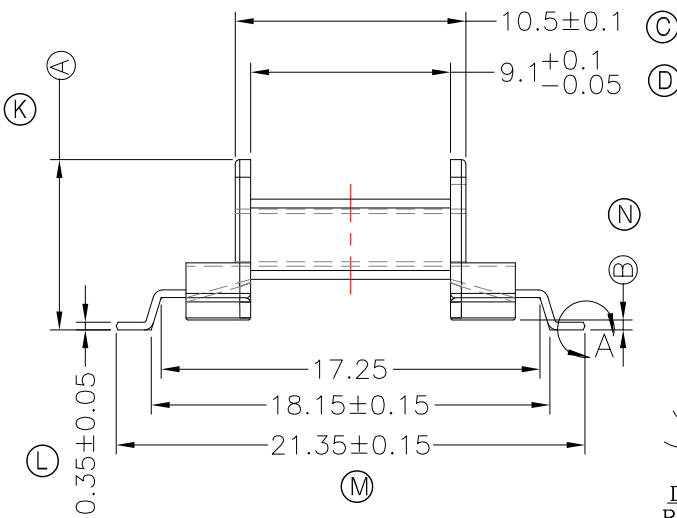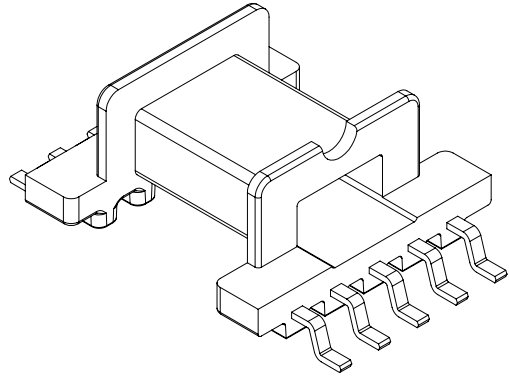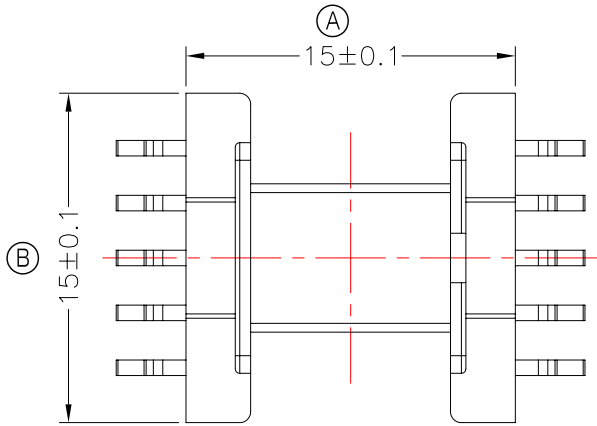

DWG NO. EFD15-10P-GW-2.5-1A-11

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-107-03111.1103	PM-9630	PB	Sn	ALL PIN (A)=7.75±0.15 (B)=0.45±0.1	
TBI-107-03111.1113	PM-9630	PB	Sn	ALL PIN (A)=7.65±0.15 (B)=0.35±0.1	H
△ TBI-107-03111.1123	PM-9630	PB	Sn	CUT PIN #3 (A)=7.75±0.15 (B)=0.45±0.1	
△ TBI-107-03111.1133	PM-9630	PB	Sn	ALL PIN (A)=8.0±0.15 (B)=0.7±0.1	
△ TBI-107-03111.1143	PM-9630	PB	Sn	CUT PIN #2,4,7,8,9 (A)=7.75±0.15 (B)=0.45±0.1	
F TBI-107-03111.1153	PM-9630	PB	Sn	CUT PIN #1,2,3,7,8 (A)=7.75±0.15 (B)=0.45±0.1	F
TBI-107-03111.1163	PM-9630	PB	Sn	CUT PIN #1,3,5,7,8 (A)=7.75±0.15 (B)=0.45±0.1	
TBI-107-03111.1173	PM-9630	PB	Sn	ALL PIN (A)=7.55±0.15 (B)=0.25±0.1	

TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05 UNIT : m / m SCALE 3 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 5