









**TRANSFORMER BOBBIN  
INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789989  
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
△1		YAN.TANG	G.F.YANG	09/02/10
△2				
△3				

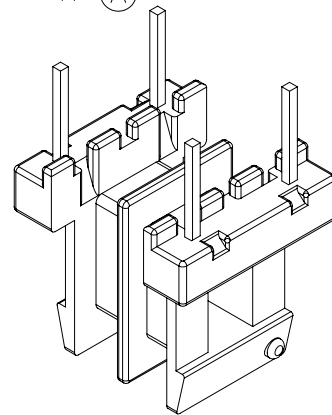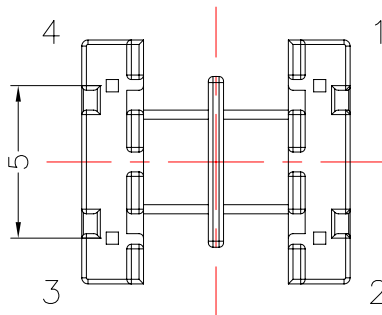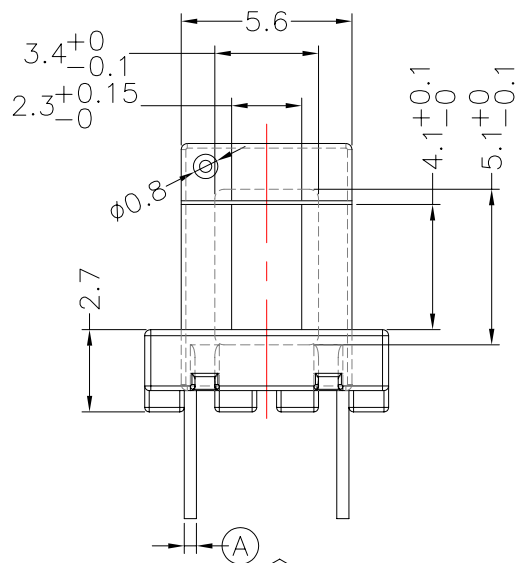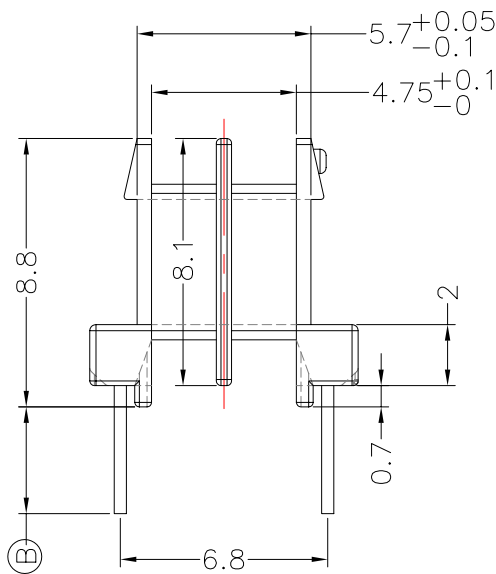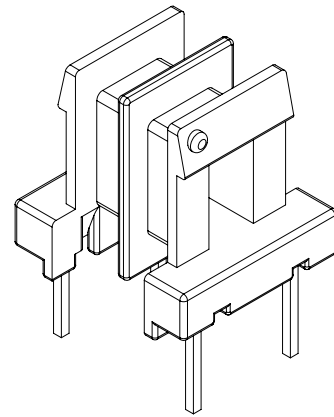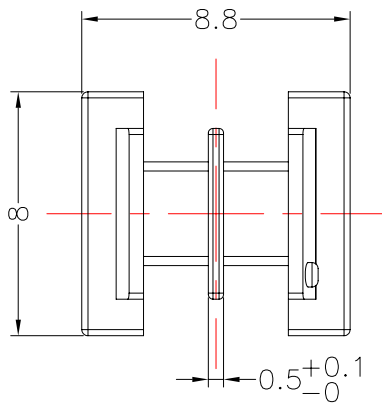

NOTE: PIN拉力1.0Kg MIN;

DWG NO.	EE8.3-4P-TH-5.0-D-11-2S				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-201-23042.1106	PM-9630	CP WIRE(3/4H)	Sn	ALL PIN (A) =SQ0.4±0.05 (B) =3.5±0.15	
TBI-201-23042.1116	PM-9630	CP WIRE(3/4H)	Sn	ALL PIN (A) =φ0.5±0.05 (B) =3.5±0.15	H
TBI-201-23042.1126	PM-9630	CP WIRE(3/4H)	Sn	ALL PIN (A) =SQ0.4±0.05 (B) =2.7±0.3	
TBI-201-23042.1136	PM-9630	CP WIRE(3/4H)	Sn	ALL PIN (A) =SQ0.4±0.05 (B) =3.0±0.15	
TBI-201-23042.1146	PM-9630	CP WIRE(3/4H)	Sn	ALL PIN (A) =φ 0.5±0.05 (B) =3.2±0.2	Pin根部要打點外露, 規格:1.2 MAX 0.05深
TBI-201-23042.1156	PM-9630	CP WIRE(3/4H)	Sn	NO PIN#1,2 (A) =φ0.5±0.05 (B) =4.2±0.2	Pin根部要打點外露, 規格:1.2 MAX 0.05深
	TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3			UNIT : m / m	SCALE 4 : 1
Finish:	1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min. 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min. 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.				REV 1