

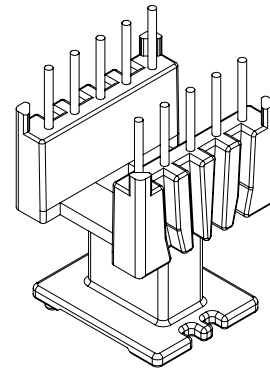
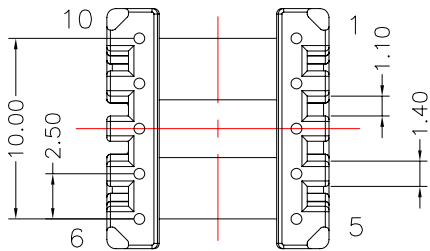
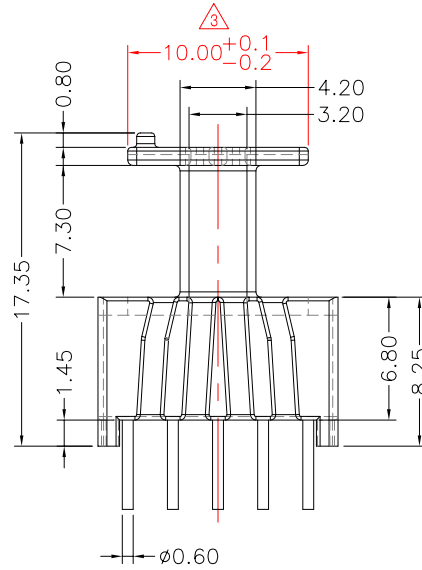
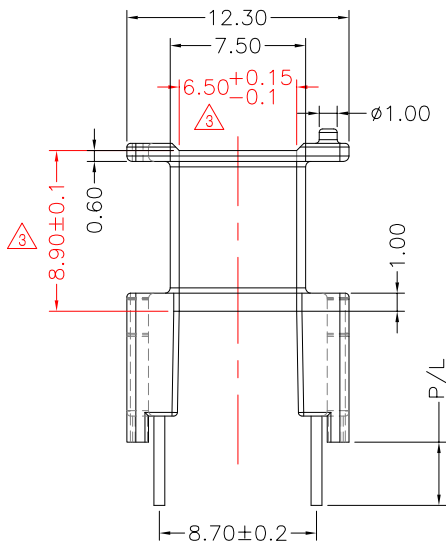


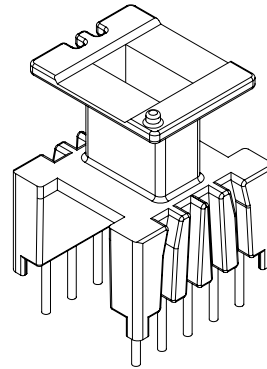

**TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
①		X.H.GU	G.F.YANG	04/30/10
②		X.H.GU	G.F.YANG	03/25/11
③		X.H.GU	G.F.YANG	04/11/12



DWG NO.	EE13-10P-TH-2.5-A1-11				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-201-07111.1106	PM-9630	CP WIRE	Sn	ALL PIN P/L=3.50±0.2	S
TBI-201-07111.1116	PM-9630	CP WIRE	Sn	CUT PIN #10 P/L=3.50±0.2	H
TBI-201-07111.1126	PM-9630	CP WIRE	Sn	CUT PIN #4,7,8,9 P/L=3.50±0.2	
TBI-201-07111.1136	PM-9630	CP WIRE	Sn	CUT PIN #5,6,8,10 P/L=3.50±0.2	
TBI-201-07111.1146	PM-9630	CP WIRE	Sn	CUT PIN #6,7,8 P/L=3.50±0.2	52GEE1310POD
TBI-201-07111.1156	PM-9630	CP WIRE	Sn	CUT PIN #6 P/L=3.50±0.2	
TBI-201-07111.1166	PM-9630	CP WIRE	Sn	CUT PIN #6,7 P/L=3.50±0.2	
TBI-201-07111.1176	PM-9630	CP WIRE	Sn	ALL PIN P/L= 5.0±0.2	
TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3				UNIT : m / m	SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches)max.

REV	3
-----	---