
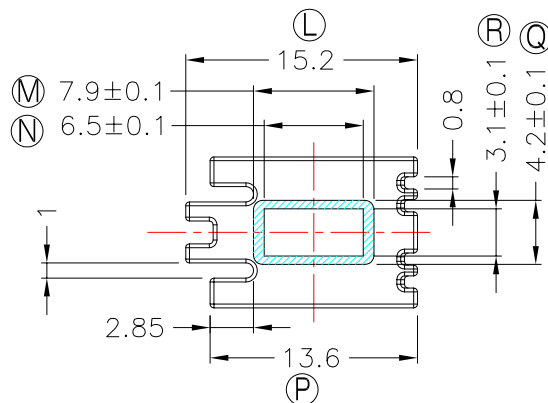
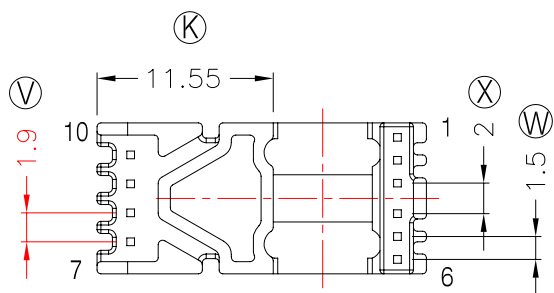
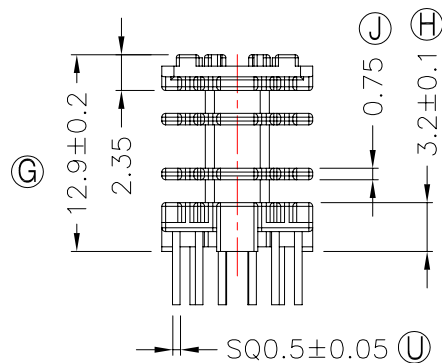
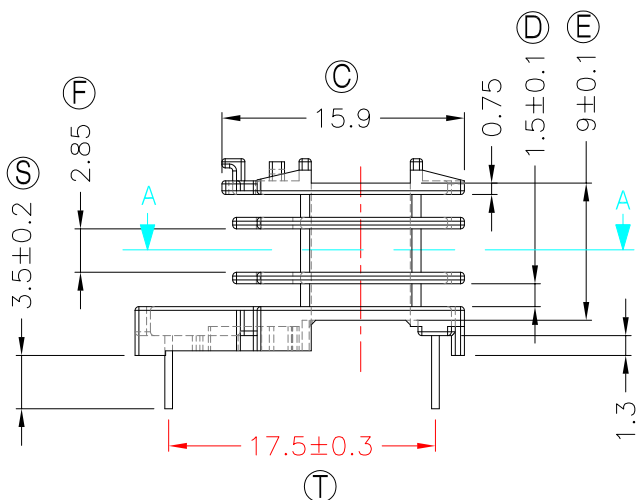
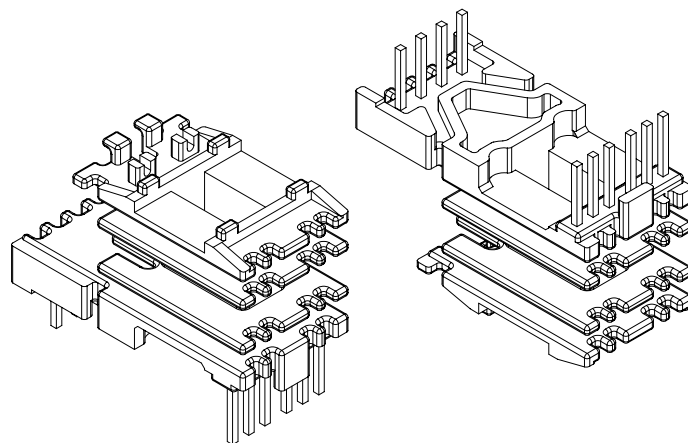


REV	SYM	DRAFTER	CHECKER	DATE
1		X.H.GU	G.F.YANG	02/07/13
2				
3				

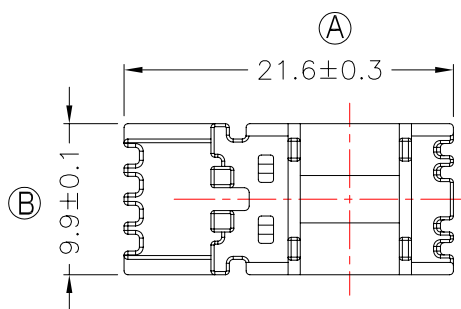


SECTION A-A

DWG NO. EE13-12.2G-10P-TH-A7-12

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
----------	-------------------	---------------------	--------------------	----------------	------

TBI-201-07171.1206	PM-9820	CP WIRE	Sn	ALL PIN	S
--------------------	---------	---------	----	---------	---



TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3

UNIT : m / m

SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP WIRE Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV	1
-----	---