









**TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.**

Tel : 886-2-22929999 Fax : 886-2-22925236
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
△		T.S.LII	W.H.HSU	06/16/04
△		T.S.LII	W.H.HSU	06/23/04
△		T.S.LII	W.H.HSU	06/24/04

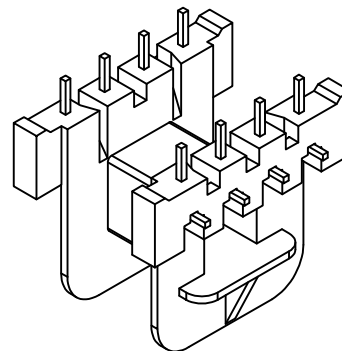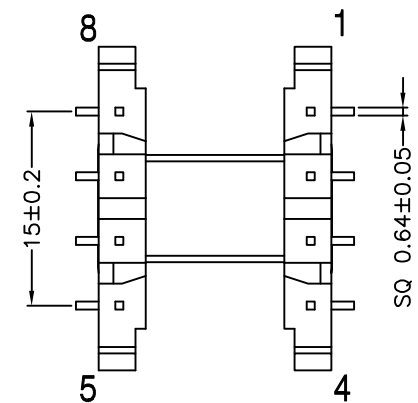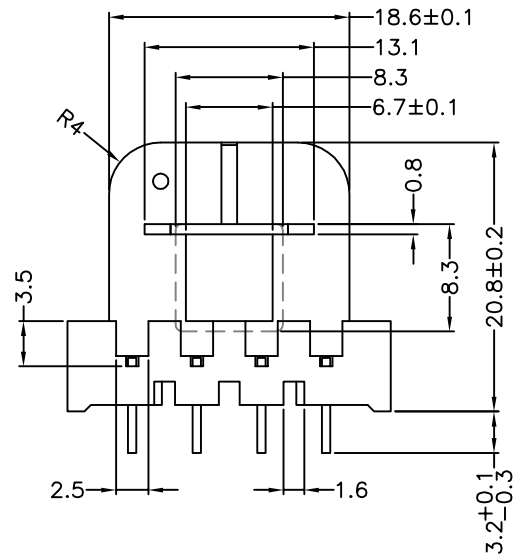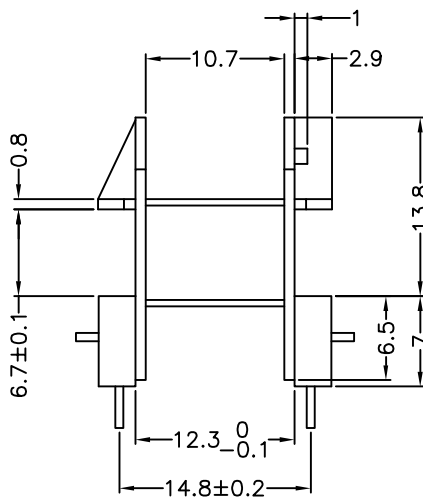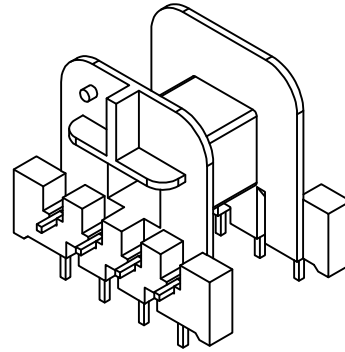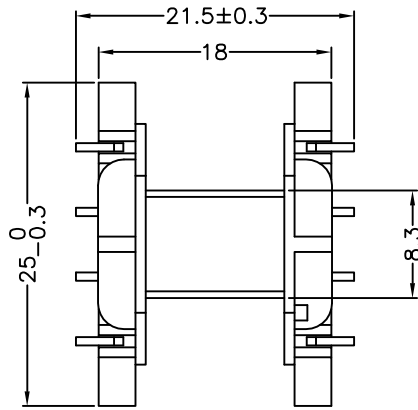

PART NO.	EE25-8P-THL-5-A-6				
DWG NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALOCATION	BUYER 'S PART NO.
TBI-201-02011.606	PBT 30% (BK)	CP WIRE	Sn	ALL PIN	
TBI-201-02011.616	PBT 30% (BK)	CP WIRE	Sn	NO PIN #2, 3, 6, 7	

TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05 **UNIT :** m/m **SCALE** 1.75 : 1

Finish: 1. Immersion gold on terminal : Thickness gold 0.075 μm (3 μ inches) min, Base nickel 0.625 μm (25 μ inches) min.
 2. Immersion Sn on terminal : Terminal: Sn plating, 100, 5 μm (200 μ inches) min , Base nickel 0.625 μm (25 μ inches) min.
 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV **3**