

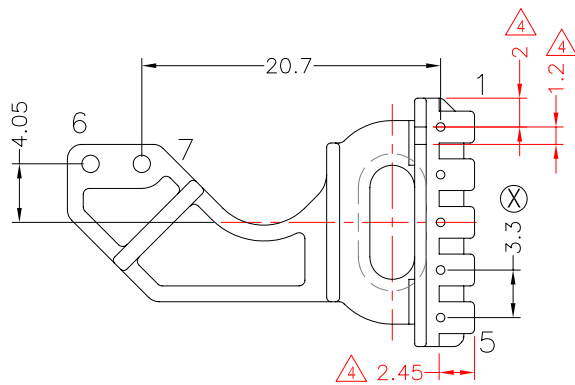
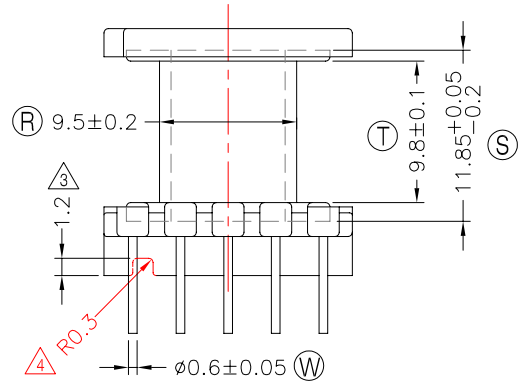
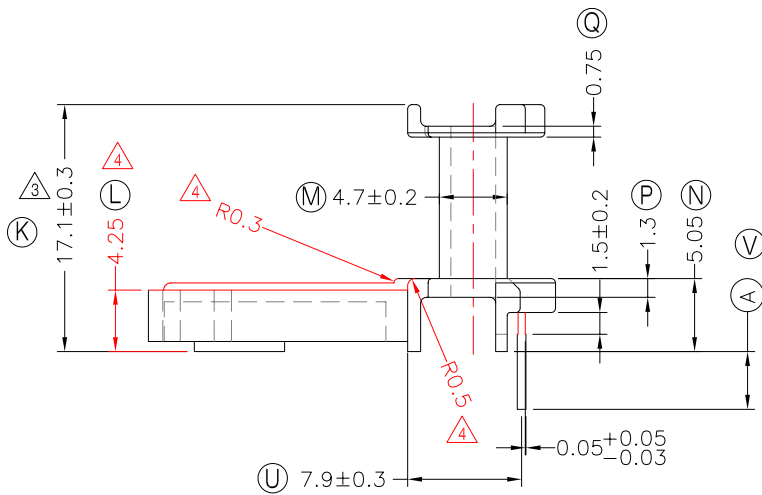


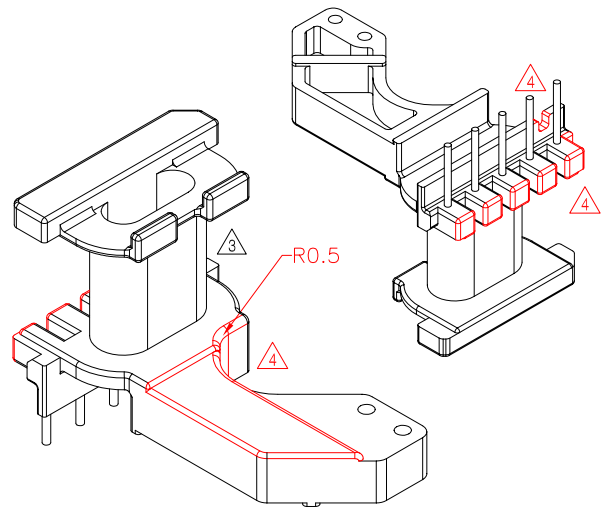

**TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789999
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
△2		X.H.GU	G.F.YANG	06/05/13
△3		H.X.DUAN	G.F.YANG	07/17/13
△4		X.H.GU	G.F.YANG	08/17/13

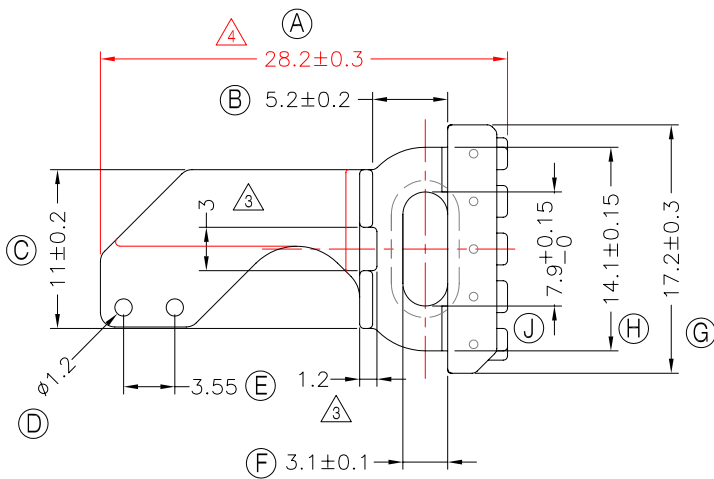

NOTE:

1. 焊錫前拉力:1.0KG MIN;焊錫後拉力:1.5KG MIN;
2. 任意一點強度須1.5kg MIN;
3. PIN咬花外露處有露銅現象可接受;

DWG NO. EPC17-5P-TH-3.3-A5-12

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-206-01151.1206	PM-9820	CP WIRE	Sn	ALL PIN (A)= 3.5±0.2	S
TBI-206-01151.1216	PM-9820	CP WIRE	Sn	ALL PIN (A)= 4.0±0.2	H
TBI-206-01151.1226	PM-9820	CP WIRE	Sn	ALL PIN (A)=5.0±0.2	
TBI-206-01151.1236	PM-9820	CP WIRE	Sn	ALL PIN (A)=3.0±0.2	
TBI-206-01151.1246	PM-9820	CP WIRE	Sn	ALL PIN (A)=2.8±0.2	暫無刀模

TOLERANCE:0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3

UNIT : m / m

SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 4