

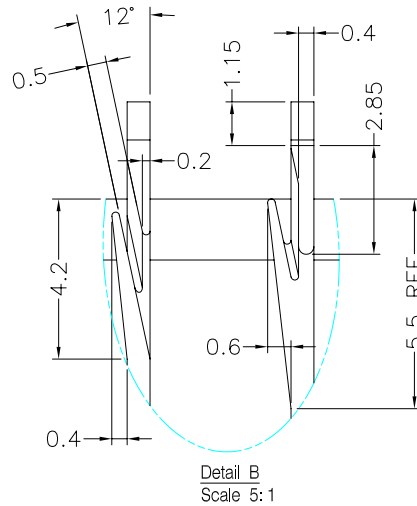
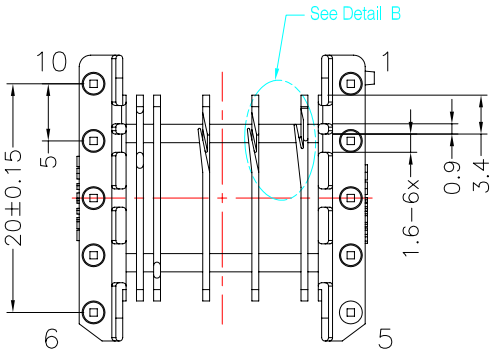
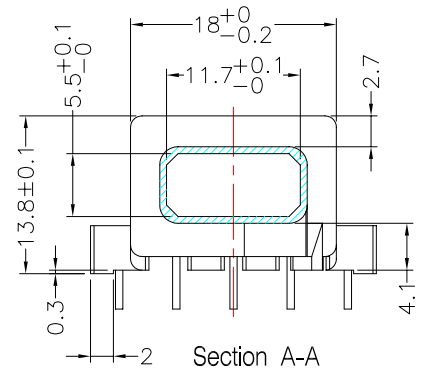
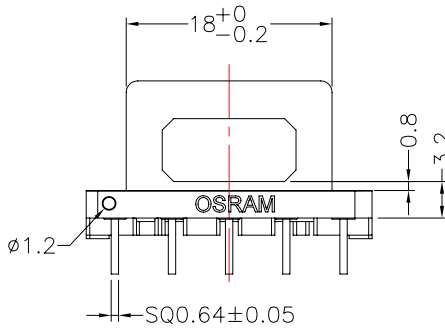
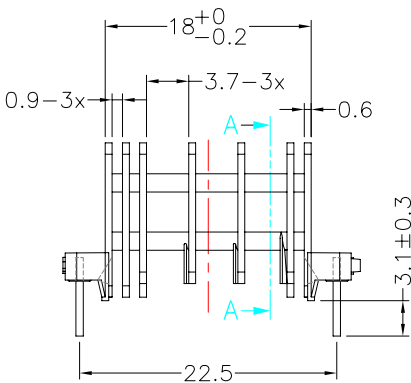
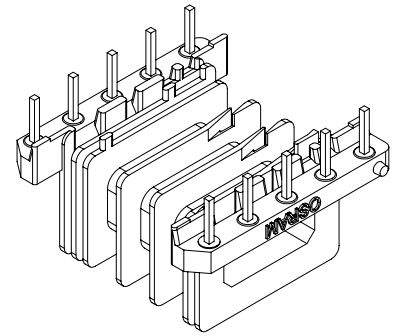


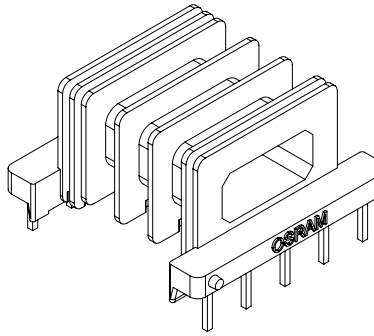

### TRANSFORMER BOBBIN INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989  
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
1		X.H.GU	G.F.YANG	06/22/11
2				
3				

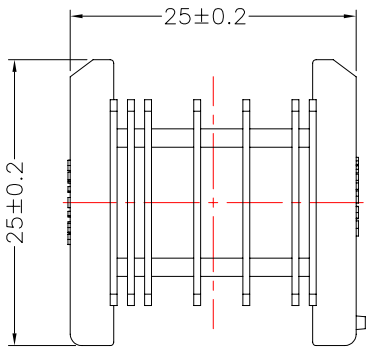

**NOTE:**

Per pin pull out force after solder: >1.0kgf/10s(solder temperature: 420±10°, 1~2s).

DWG NO.	EFD25-10P-TH-5.0-B6-11-6S				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-207-02261.1106	PM-9630(BK)	CP WIRE	Sn	ALL PIN	
TBI-207-02261.1116	PM-9630(BK)	CP WIRE	Sn	NO PIN#1	H
TOLERANCE: 0<L≤4:±0.1 4<L≤16:±0.2 16<L≤63:±0.3				UNIT : m / m	SCALE 1.5 : 1
Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min. 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min. 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.					REV 1