









**TRANSFORMER BOBBIN INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789989  
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

| REV | SYM | DRAFTER  | CHECKER  | DATE     |
|-----|-----|----------|----------|----------|
| 1   |     | YAN.TANG | G.F.YANG | 05/29/09 |
| 2   |     | X.H.GU   | G.F.YANG | 08/06/09 |
| 3   |     | YAN.TANG | G.F.YANG | 12/01/09 |

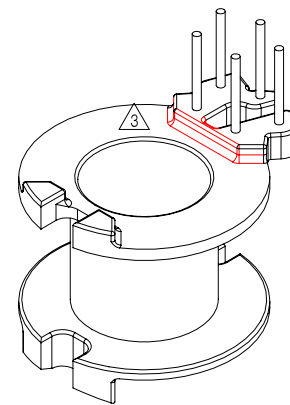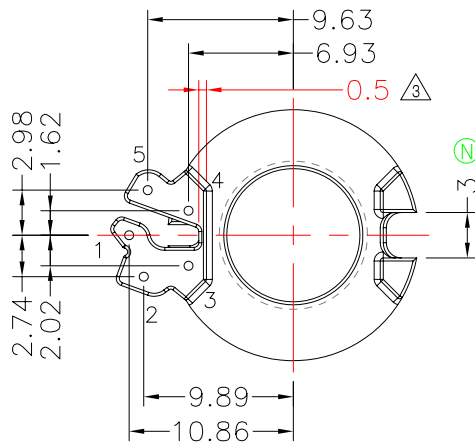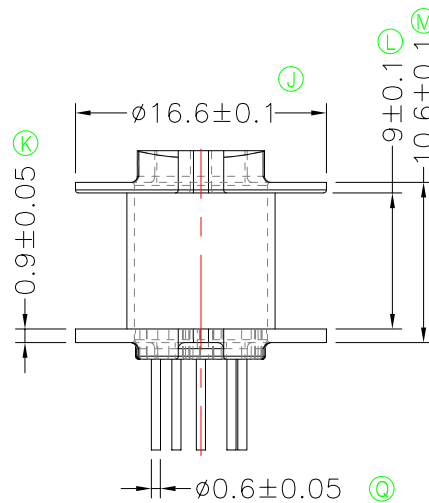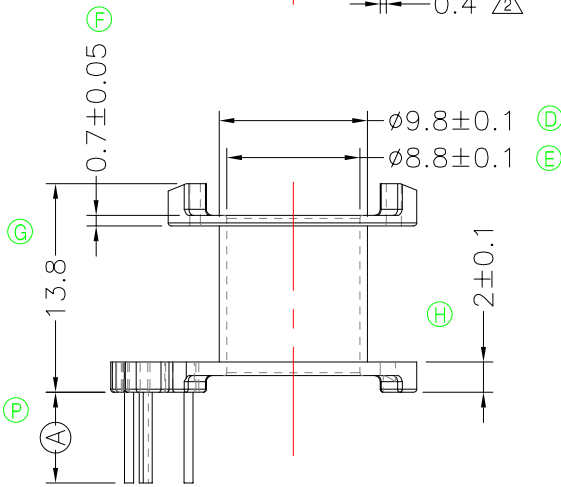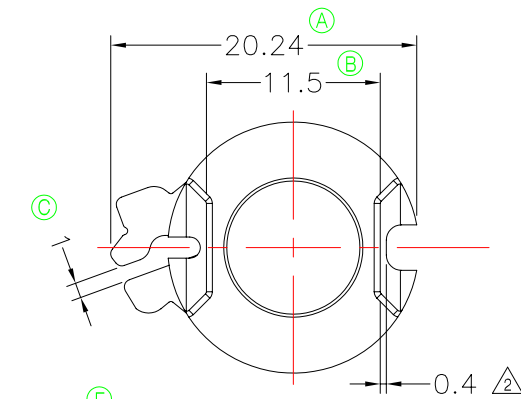

DWG NO. RM8-5P-TH-E-12

| PART NO.   | MATERIAL (BOBBIN) | MATERIAL (TERMINAL) | TERMINAL (PLATING) | PIN ALLOCATION               | NOTE      |
|--|-------------------|---------------------|--------------------|------------------------------|-----------|
| TBI-208-05051.1206   | PM-9820           | CP WIRE             | Sn                 | ALL PIN (A) = 6±0.2 (3)      |           |
| TBI-208-05051.1216   | PM-9820           | CP WIRE             | Sn                 | CUT PIN #5 (A) = 6±0.2 (3)   |           |
| TBI-208-05051.1226   | PM-9820           | CP WIRE             | Sn                 | CUT PIN #1 (A) = 4.6±0.2 (3) |           |
| TBI-208-05051.1236   | PM-9820           | CP WIRE             | Sn                 | CUT PIN #5 (A) = 4.6±0.2 (3) |           |
| TOLERANCE: 0<L<6: ±0.1 6<L<20: ±0.2 20<L<50: ±0.3  |                   |                     |                    | UNIT : m/m                   | SCALE 2:1 |
| Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.<br>2. CP WIRE Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.<br>3. Coplanarity deviation: 0.10 mm (0.004 inches) max. |                   |                     |                    |                              | REV 3     |