









TRANSFORMER BOBBIN INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

| REV | SYM | DRAFTER | CHECKER | DATE |
|-----|-----|---------|----------|----------|
| 1 | | M.WANG | G.F.YANG | 11/18/16 |
| 2 | | | | |
| 3 | | | | |

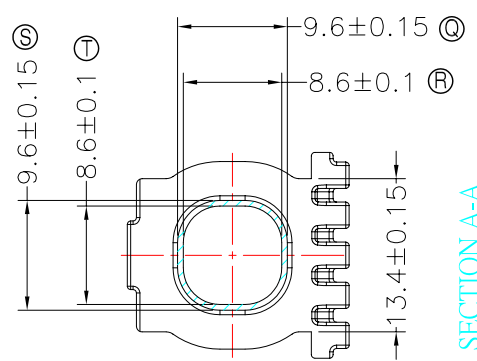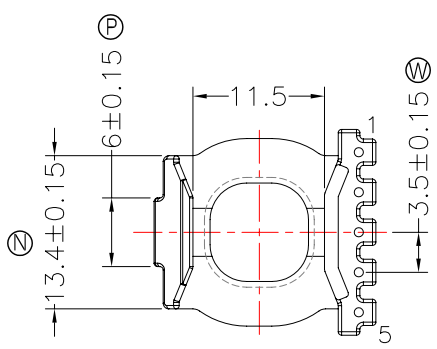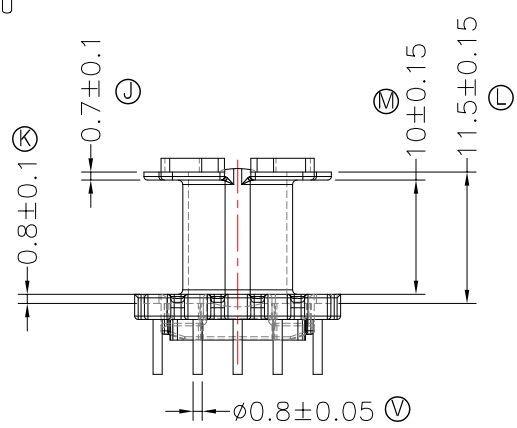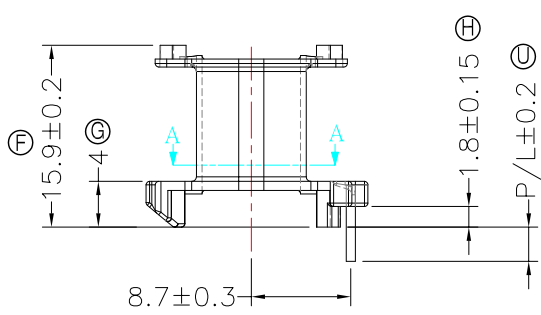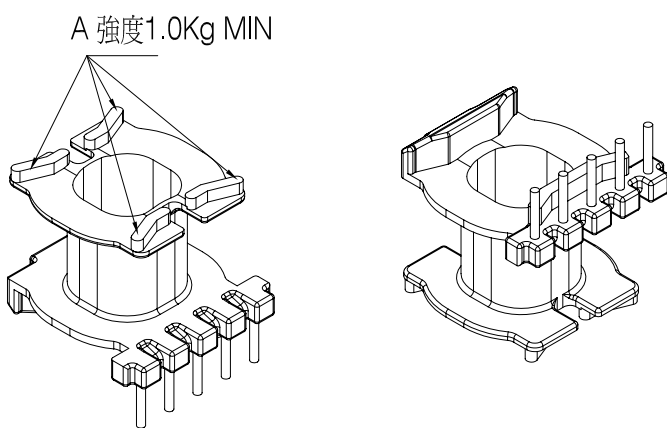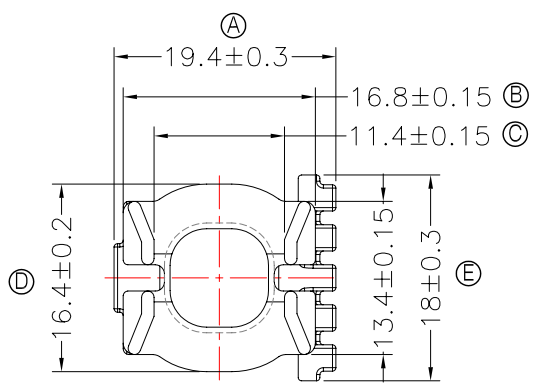

- NOTE:
- 1.耐壓4.0Kv /1.5mA 60S;
 - 2.焊錫溫度:450°±10° 3SEC
 - 3.焊錫前拉力:1.0KG MIN,焊錫後拉力:1.5KG MIN;
 - 4.任意一點強度須1.5kg MIN(其中 A 處強度為1.0KG MIN);
 - 5.WINDING SPACE: 3.4mm*10mm=34mm²

| | | | | | |
|---|-----------------------|---------------------|--------------------|---------------------|-------------|
| DWG NO. | ATQ21-16.8-5P-TH-H-17 | | | | |
| PART NO. | MATERIAL (BOBBIN) | MATERIAL (TERMINAL) | TERMINAL (PLATING) | PIN ALLOCATION | NOTE |
| TBI-238-13081.1706 | PM-9823 | CP WIRE | Sn | ALL PIN P/L=3.0±0.2 | S H |
| | | | | | |
| | | | | | |
| | | | | | |
| TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3 | | | | UNIT : m / m | SCALE 1 : 1 |

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

| | |
|-----|---|
| REV | 1 |
|-----|---|