









TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
①		X.H.GU	G.F.YANG	08/31/11
②				
③				

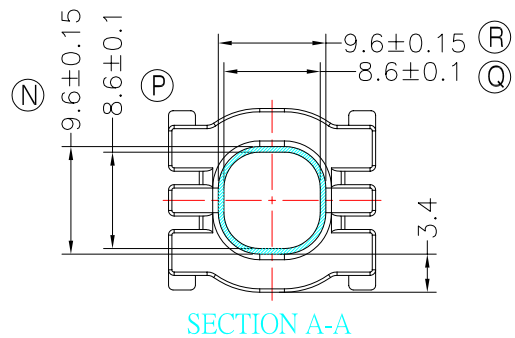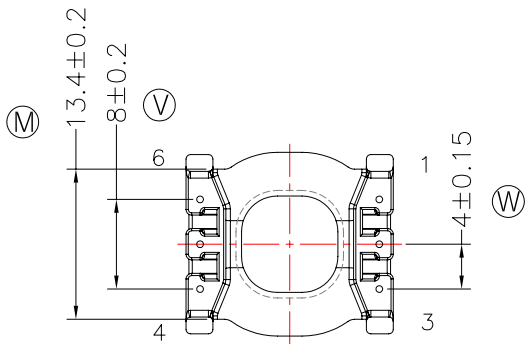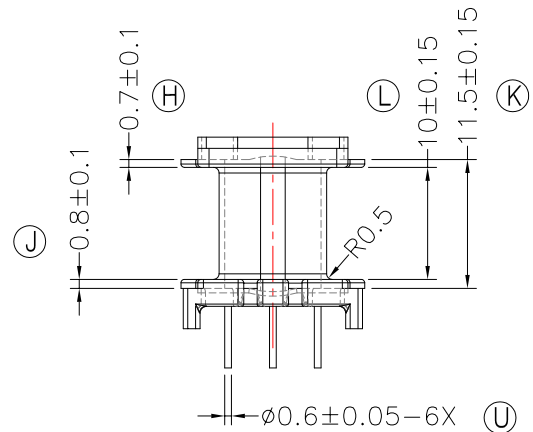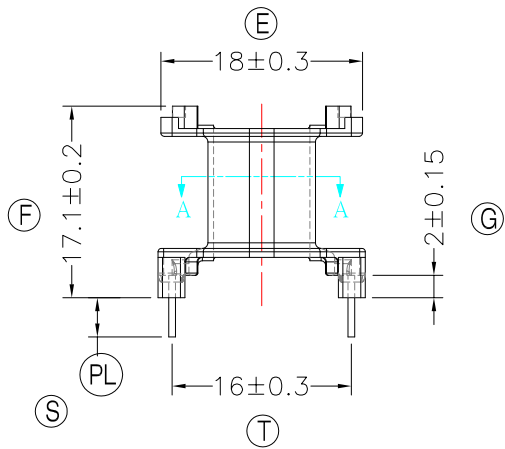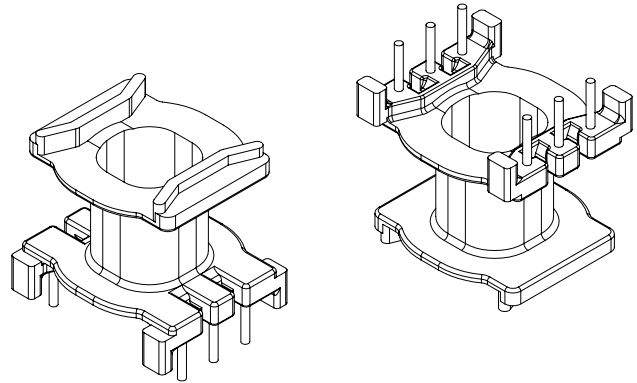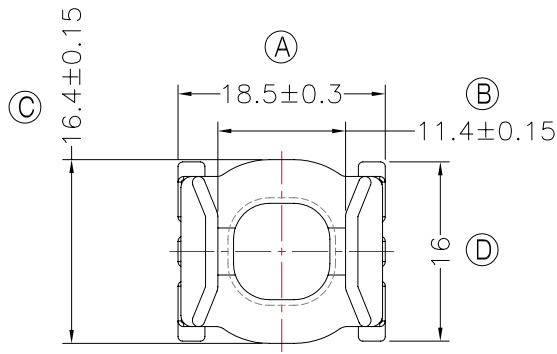

NOTE:
1. 焊錫前拉力: 1.0KG MIN
2. 焊錫後拉力: 1.5KG MIN
3. 任意一點強度須 1.0kg MIN;
4. WINDING SPACE: 3.4mm*10mm=34mm²

DWG NO.	ATQ21-16.8-6P-TH-A7-12				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-238-13171.1206	PM-9820	CP WIRE	Sn	ALL PIN (PL) = 3.5±0.2	S
TBI-238-13171.1216	PM-9820	CP WIRE	Sn	CUT PIN#2,3,4,5 (PL) = 3.5±0.2	H
TBI-238-13171.1226	PM-9820	CP WIRE	Sn	CUT PIN#3,5 (PL) = 3.5±0.2	
TBI-238-13171.1236	PM-9820	CP WIRE	Sn	CUT PIN#2,3,4,5 (PL) = 5±0.5	
TBI-238-13171.1246	PM-9820	CP WIRE	Sn	CUT PIN#2,3,4,5 (PL) = 3.3±0.2	
TBI-238-13171.1256	PM-9820	CP WIRE	Sn	CUT PIN#1,3,4,6 (PL) = 3.3±0.2	
TBI-238-13171.1266	PM-9820	CP WIRE	Sn	CUT PIN#1,3,4,6 (PL) = 5.0±0.3	
TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L:±0.3				UNIT : m/m	SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness: Sn plating, 100,5 μm (200 μ inches) min, Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness: Sn plating, 100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 1