









TRANSFORMER BOBBIN  
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989  
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

# REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
1		X.H.GU	G.F.YANG	12/04/10
2		X.H.GU	G.F.YANG	11/07/16
3				

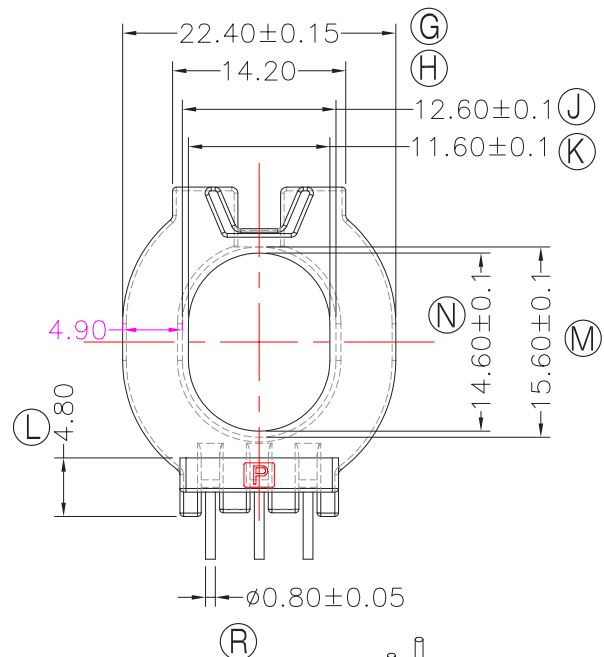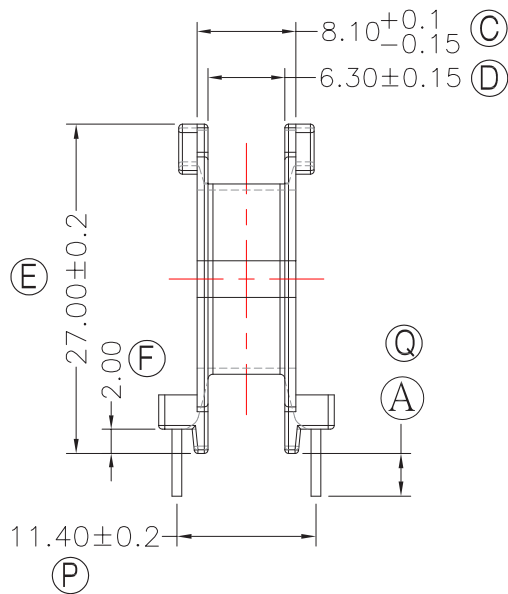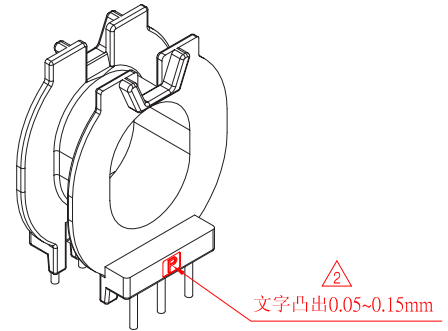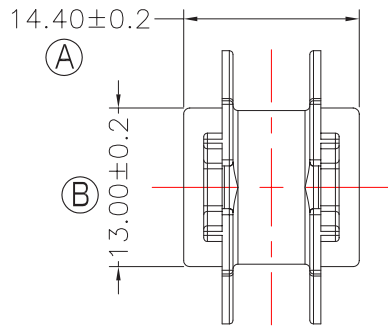

Winding Space=6.3\*4.9=30.87mm^2

DWG NO. ATQ27-14.4-6P-TH-D8-12

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
----------	-------------------	---------------------	--------------------	----------------	------

TBI-238-03481.1206	PM-9820	CP WIRE	Sn	ALL PIN (A)=3.5±0.2	S
TBI-238-03481.1216	PM-9820	CP WIRE	Sn	CUT PIN#3,4,6 (A)=3.5±0.2	H
TBI-238-03481.1226	PM-9820	CP WIRE	Sn	CUT PIN#3,4,6 (A)=5±0.5	
TBI-238-03481.1236	PM-9820	CP WIRE	Sn	CUT PIN#3,4,6 (A)=3.0±0.2	
TBI-238-03481.1246	PM-9820	CP WIRE	Sn	CUT PIN#1,3,4,6 (A)=3.0±0.2	
TBI-238-03481.1256	PM-9820	CP WIRE	Sn	CUT PIN#1,2,4,6 (A)=3.0±0.2	
TBI-238-03481.1266	PM-9820	CP WIRE	Sn	CUT PIN#4,5 (A)=5±0.5	
TBI-238-03481.1276	PM-9820	CP WIRE	Sn	CUT PIN#4,5 (A)=3.5±0.2	

TOLERANCE: 0<L<=4: ±0.1 4<L<=16: ±0.2 16<L<=63: ±0.3	UNIT : m / m	SCALE 1 : 1
--	--------------	-------------

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.  
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.  
3. Coplanarity deviation: 0.10 mm (0.004 inches )max.

REV	2
-----	---