








TRANSFORMER BOBBIN INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
1		X.H.GU	G.F.YANG	05/25/16
2				
3				

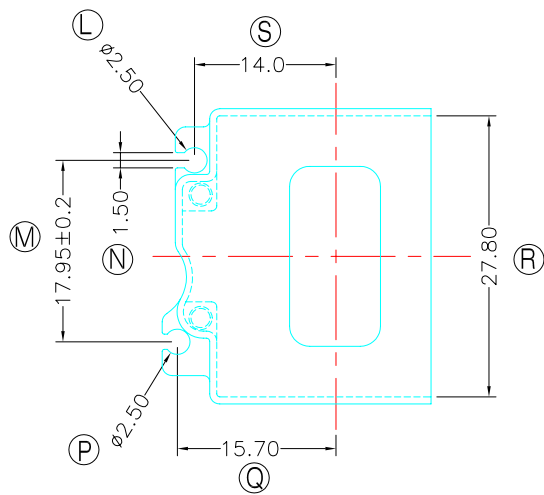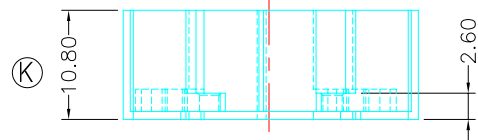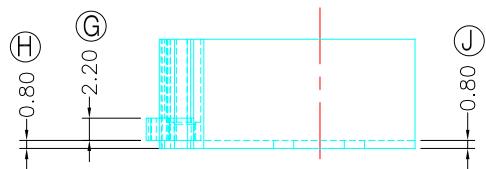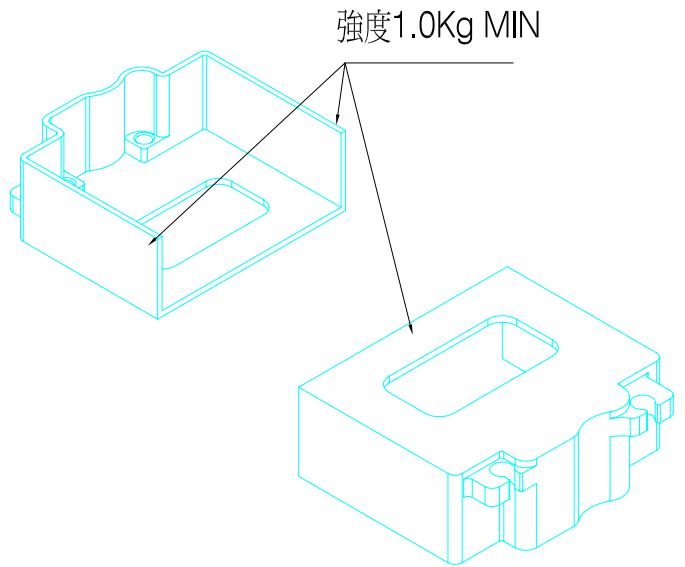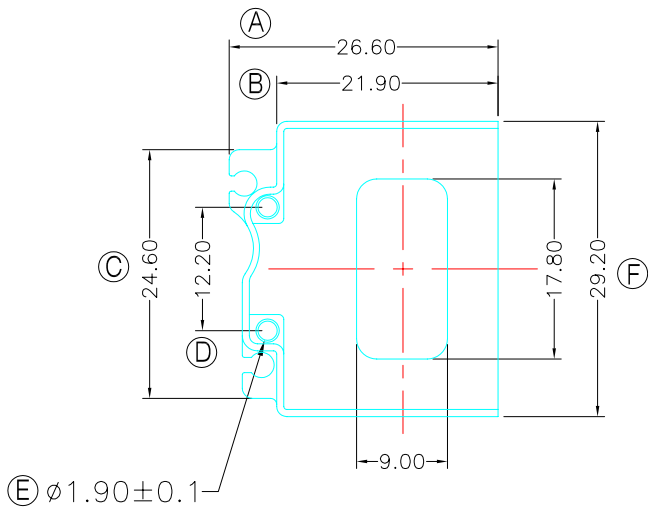

NOTE:

- 耐壓4.0Kv /1.5mA 60S;
 - 任意一點強度須1.5kg Min, 其中A處強度為1.0Kg Min;
- 與TBI-238-03401.17XX(ATQ27-16-1-5P-TH-D0-17)配套使用;

DWG NO.	ATQ27-16-1-CASE-G0-17				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-238-03701.17C	PM-9823	NA	NA		S
TOLERANCE: 0<L<=4±0.1 4<L<=16±0.2 16<L<=63±0.3					
UNIT : m / m				SCALE 1 : 1	
Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μ m (200 μ inches) min,Base nickel 0.625 μ m (25 μ inches) min.					
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μ m (200 μ inches) min.					
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.					
REV	1				