




TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
1		X.H.GU	G.F.YANG	08/20/12
2		X.H.GU	G.F.YANG	12/03/16
3				

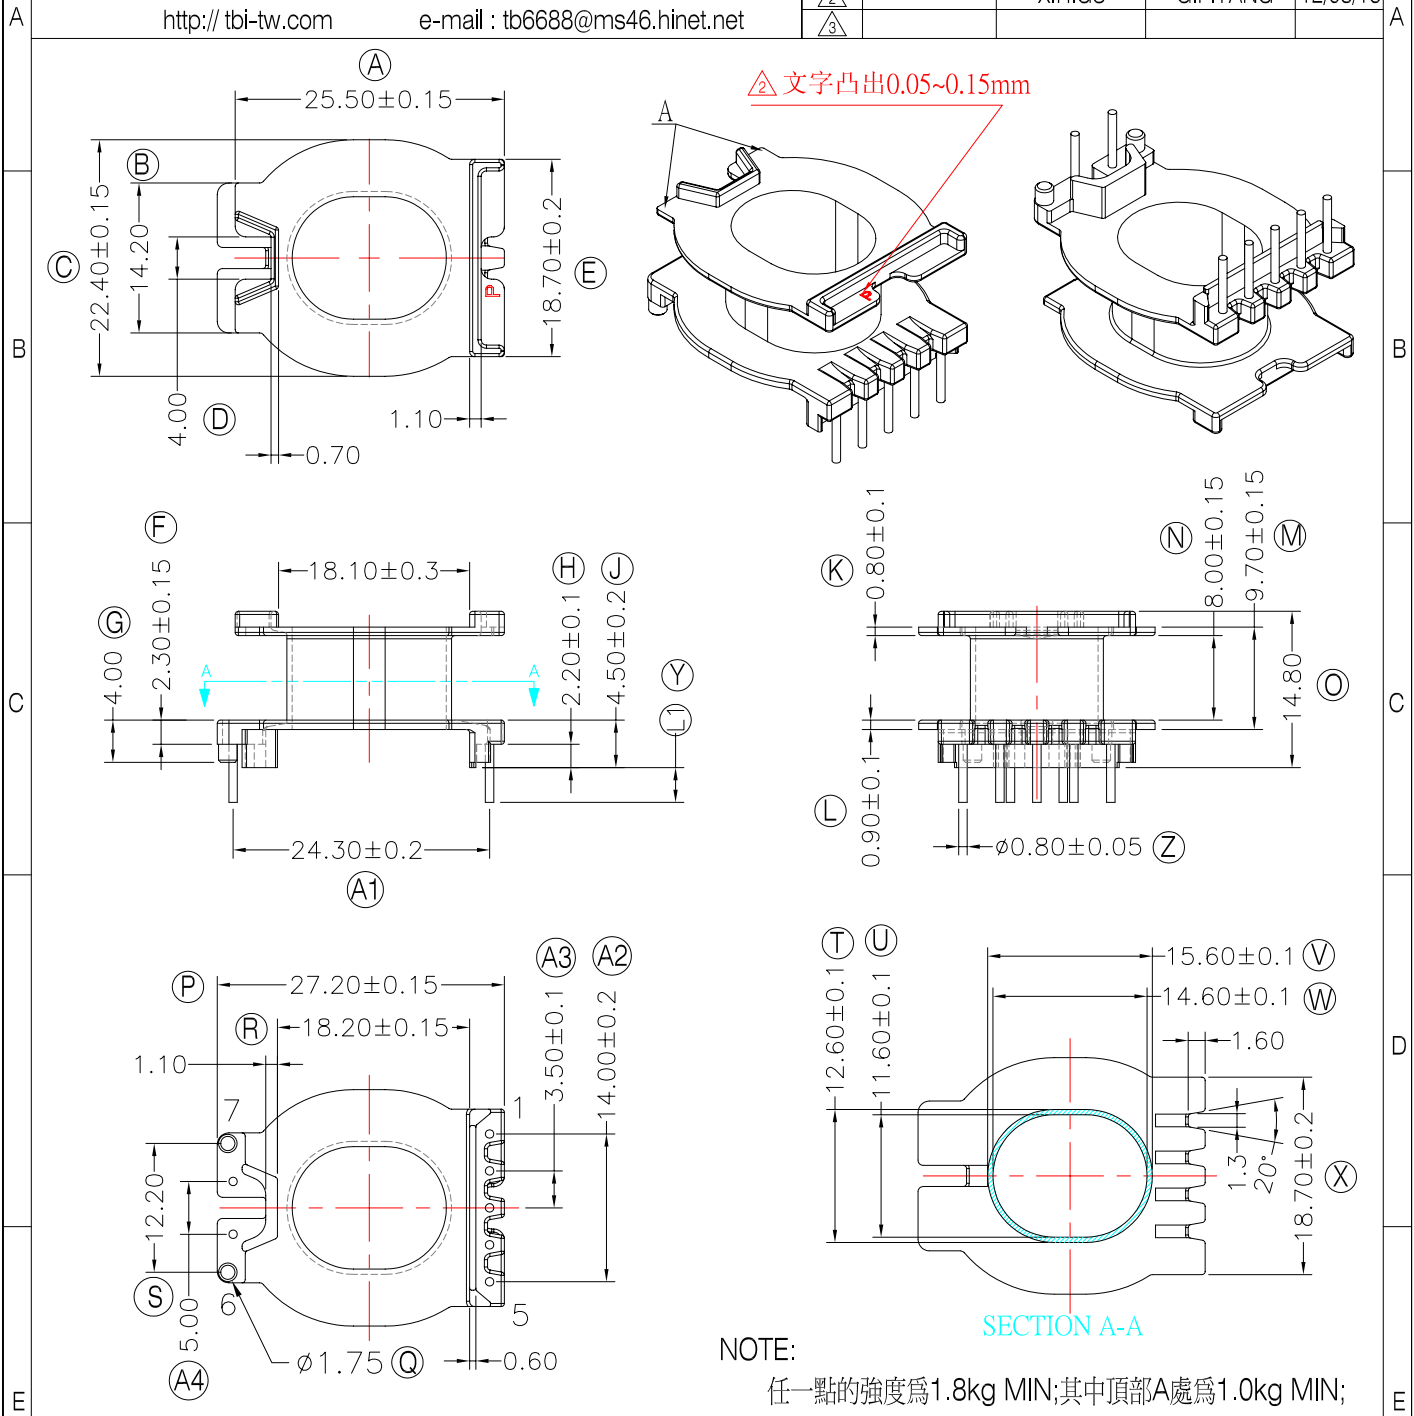

NOTE:
任一點的強度為1.8kg MIN;其中頂部A處為1.0kg MIN;

DWG NO.	ATQ27-16-1-7P-TH-G8-12					
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE	
TBI-238-03781.1206	PM-9820	CP WIRE	Sn	ALL PIN (L1) = 3.3±0.2		S
TBI-238-03781.1216	PM-9820	CP WIRE	Sn	NO PIN #1,2,3 (L1) = 3.3±0.2		H
TBI-238-03781.1226	PM-9820	CP WIRE	Sn	NO PIN #1,2,7 (L1) = 3.3±0.2		
TBI-238-03781.1236	PM-9820	CP WIRE	Sn	NO PIN #3 (L1) = 4.0±0.3		
TBI-238-03781.1246	PM-9820	CP WIRE	Sn	NO PIN #3 (L1) = 5.5±0.2		
TBI-238-03781.1256	PM-9820	CP WIRE	Sn	CUT PIN#3 (L1) = 3.6±0.2		
TBI-238-03781.1266	PM-9820	CP WIRE	Sn	NO PIN #1,3,5 (L1) = 3.3±0.2		
TBI-238-03781.1276	PM-9820	CP WIRE	Sn	NO PIN #1,3,5 (L1) = 4.0±0.2		
TBI-238-03781.1286	PM-9820	CP WIRE	Sn	NO PIN #1,3,5 (L1) = 3.0±0.2		
TBI-238-03781.1296	PM-9820	CP WIRE	Sn	NO PIN #1,2,7 (L1) = 5.5±0.2		
TOLERANCE: 0<L<=4±0.1 4<L<=16±0.2 16<L<=63±0.3				UNIT : m / m	SCALE 1 : 1	

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5µm (200µ inches) min,Base nickel 0.625µm (25µ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5µm (200µ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV	2
-----	---