









**TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net


REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
①		M.WANG	G.F.YANG	07/25/16
②				
③				

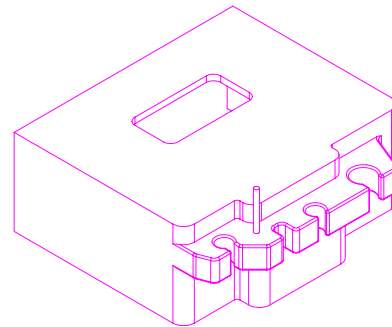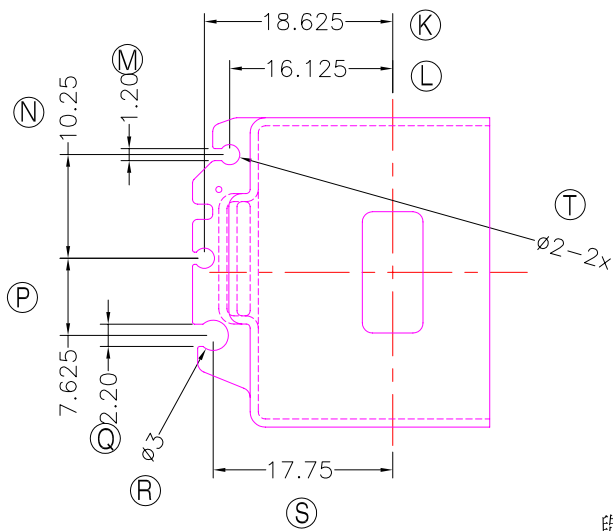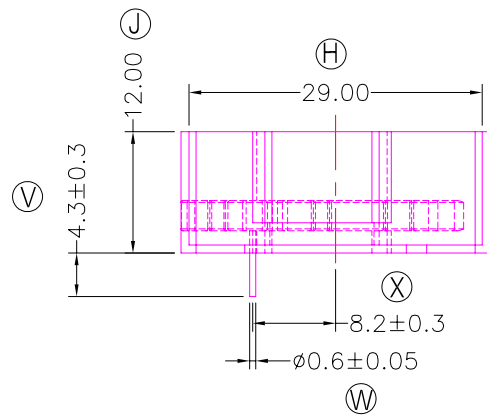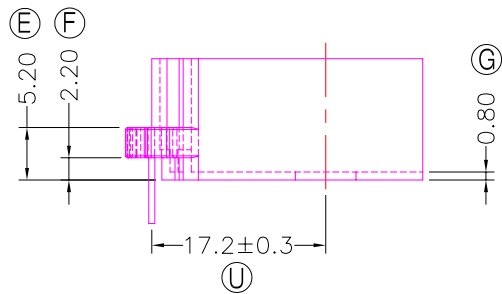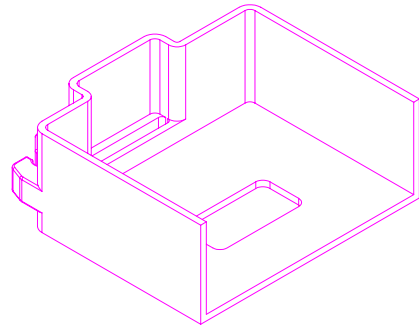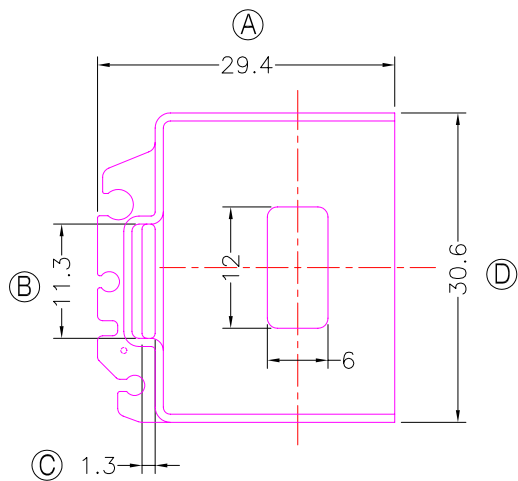

與TBI-238-07201.17XX(ATQ28-18.3B-5P-TH-B0-17)配套使用;

DWG NO.	ATQ28-18.3B-1P-CASE-B1-17				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-238-07211.1706	PM-9823	CP WIRE	Sn	ALL PIN	S
TBI-238-07211.1716	PM-9823	CP WIRE	Sn	NO PIN	H



TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3

UNIT : m / m

SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 1