

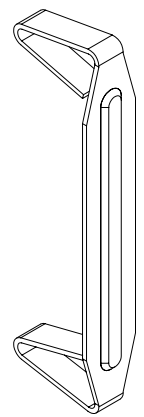
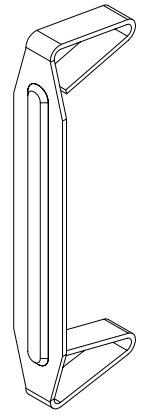


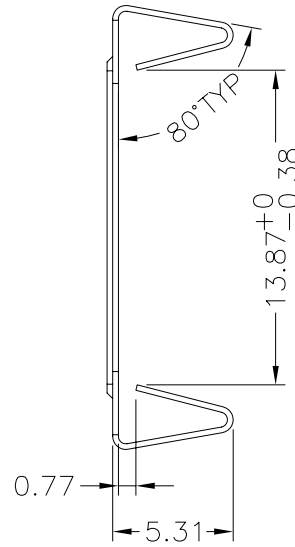

**TRANSFORMER BOBBIN INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789989  
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
1		S.Y.TANG	W.H.HSU	07/13/07
2				
3				

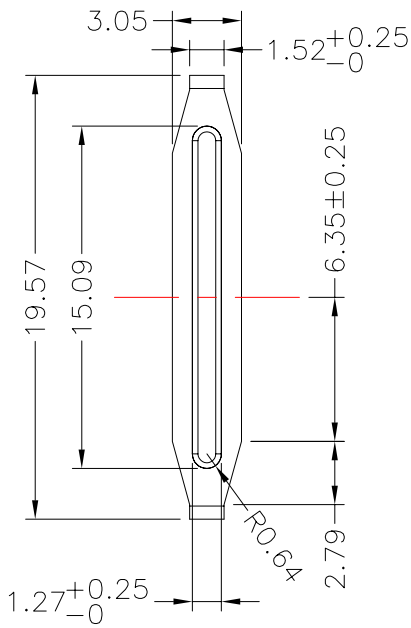

**NOTES:**

1. UNLESS OTHERWISE SPECIFIED ALL INSIDE RADII SHALL BE .020+.000/-0.007.
2. AFTER FORMING, STRESS ANNEAL AT 600° F FOR A HALF HOUR MIN IN AN INERT ATMOSPHERE

**T=0.25**

DWG NO.	EE12.7-CLIP				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (CLIP)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-401-03031.1		SUS 301			

	TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05			UNIT : m / m	SCALE 3 : 1
	Finish: 1. Pb wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μ m (200 μ inches) min,Base nickel 0.625 μ m (25 μ inches) min. 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μ m (200 μ inches) min. 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.				REV