









TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.


Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
①		YAN.TANG	G.F.YANG	05/13/10
②				
③				

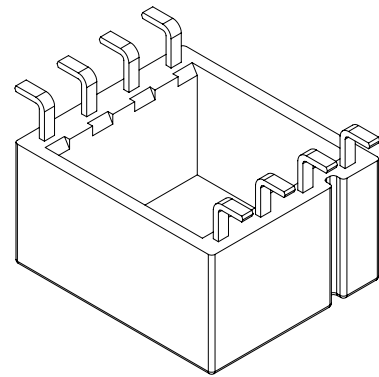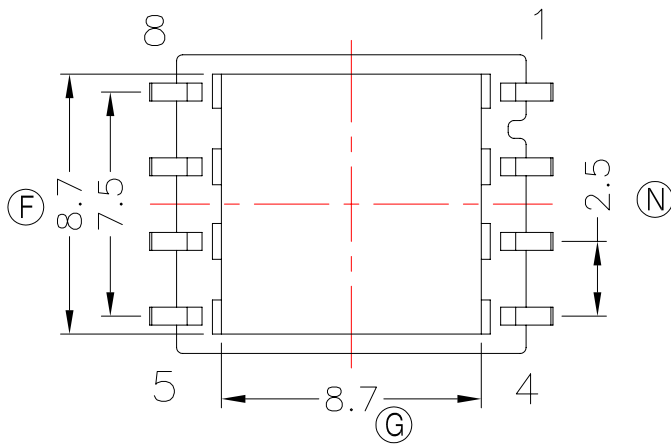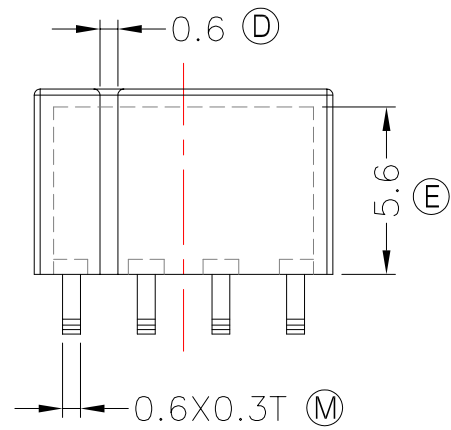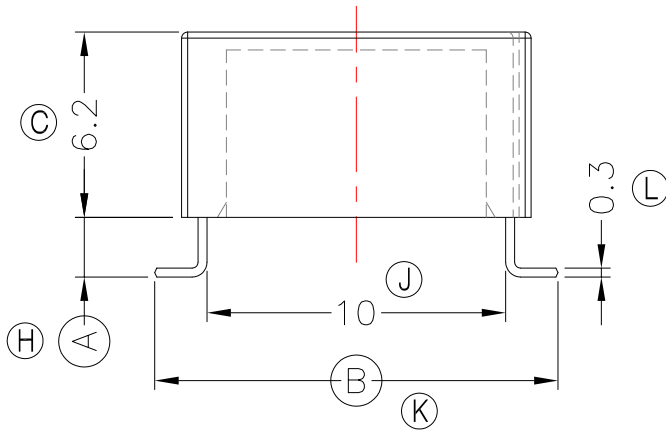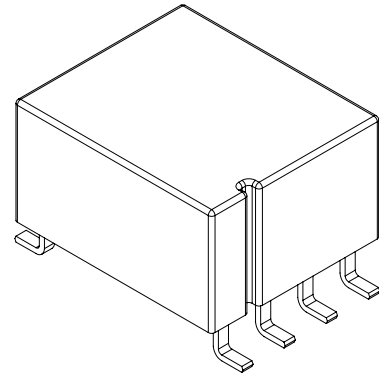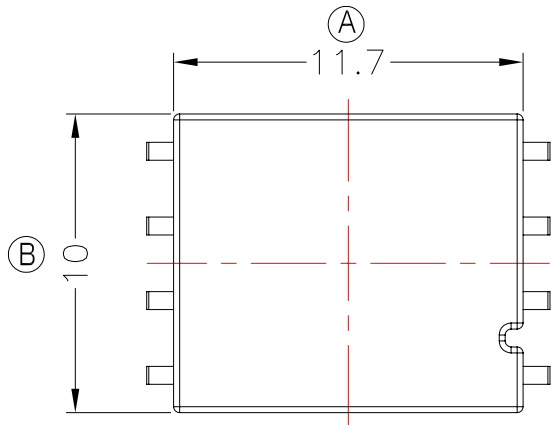

DWG NO.	H11.7X10-8P-L-2.5-A8-11				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-113-06181.1106	PM-9630(BK)	CP WIRE	Sn	ALL PIN (A)=2.0±0.2 (B)=13.5±0.3	H
TBI-113-06181.1116	PM-9630(BK)	CP WIRE	Sn	ALL PIN (A)=1.4±0.2 (B)=13.9±0.3	
TBI-113-06181.1126	PM-9630(BK)	CP WIRE	Sn	ALL PIN (A)=1.4±0.2 (B)=13.5±0.3	
TBI-113-06181.1133	PM-9630(BK)	PB WIRE	Sn	ALL PIN (A)=2.0±0.2 (B)=13.5±0.3	
TBI-113-06181.1143	PM-9630(BK)	PB WIRE	Sn	ALL PIN (A)=1.4±0.2 (B)=13.9±0.3	成品後電鍍
TBI-113-06181.1153	PM-9630(BK)	PB WIRE	Sn	ALL PIN (A)=1.4±0.2 (B)=13.5±0.3	
TBI-113-06181.1163	PM-9630(BK)	PB WIRE	Sn	ALL PIN (A)=1.0±0.2 (B)=13.5±0.3	



TOLERANCE: 0~10:±0.08 10~20:±0.15

UNIT : m/m

SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches)max.

REV 1