







TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.



Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
2		T.S.LII	W.H.HSU	07/26/06
3		T.S.LII	W.H.HSU	04/02/07
4		T.S.LII	W.H.HSU	03/04/08

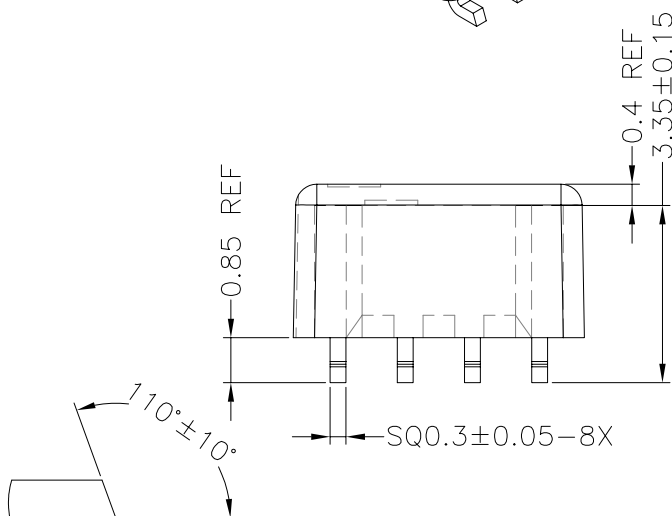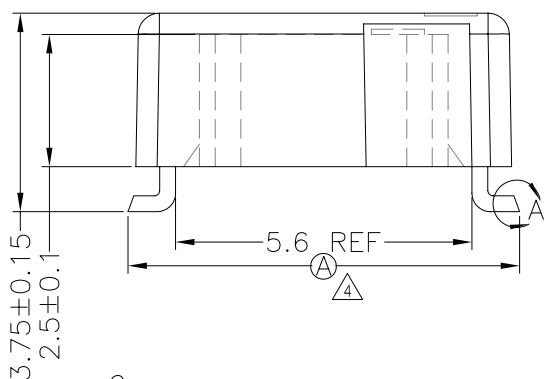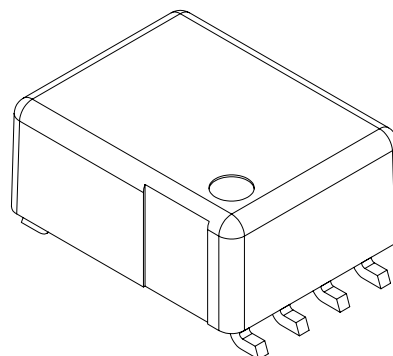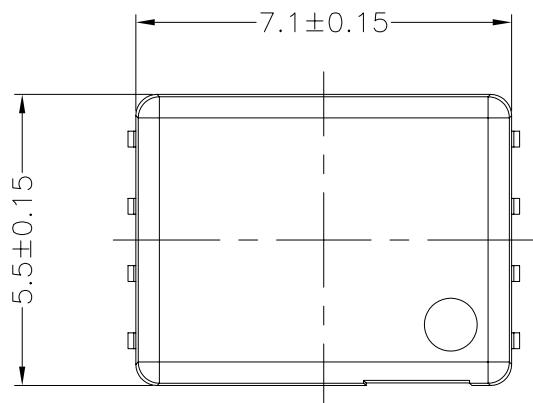


DETAIL:A-10:1
PATENTED

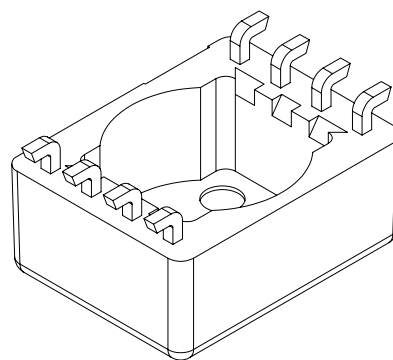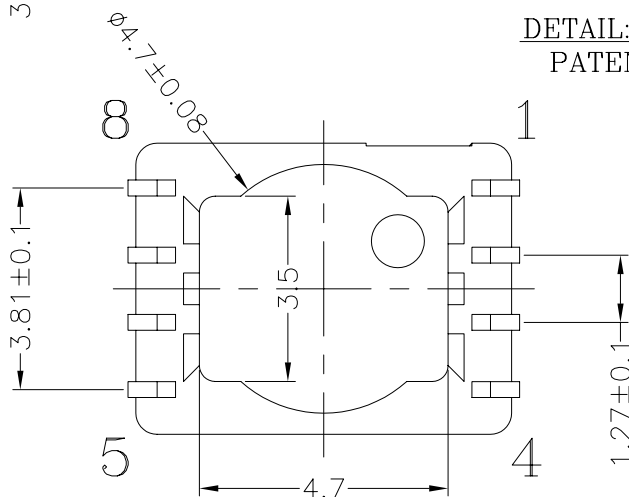

NOTE:CASE 頂部共面度為0.15 MAX.
PIN拉力0.6MIN.

DWG NO. C0001-8P-L-1.27-A-1

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-113-09011.103	PM-9630	C5191	Sn	ALL PINS =7.4±0.15	
TBI-113-09011.113	PM-9630	C5191	Sn	ALL PINS =8.3±0.15	



TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05

UNIT : m / m

SCALE 7 : 1

Finish: 1. Pb wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches)max.

REV 4