








TRANSFORMER BOBBIN INDUSTRIAL CO.,LTD.



Tel : 86-769-88789999 Fax : 86-769-88789989
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
2		T.S.LII	W.H.HSU	07/24/06
3		T.S.LII	W.H.HSU	04/02/07
4		YAN.TANG	G.F.YANG	03/04/08

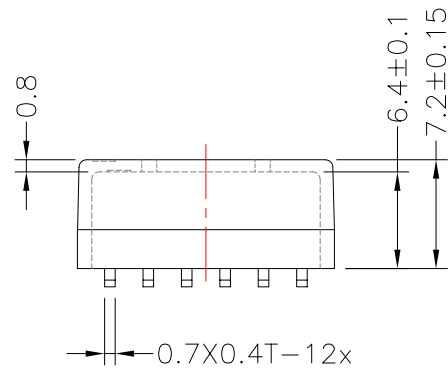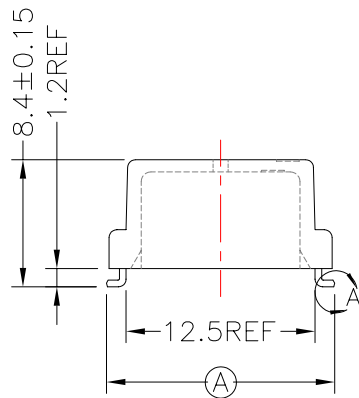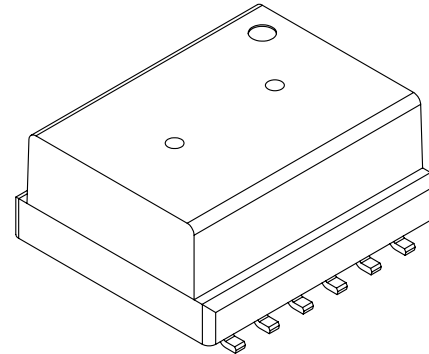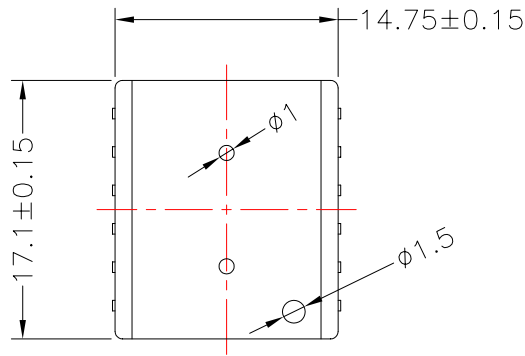

DETAIL:A
PATENTED

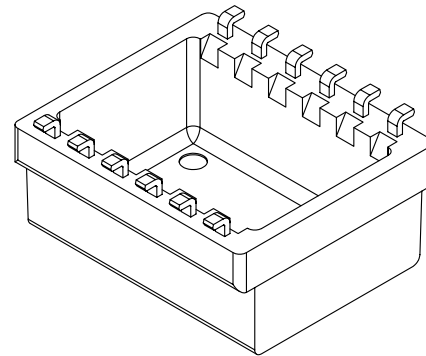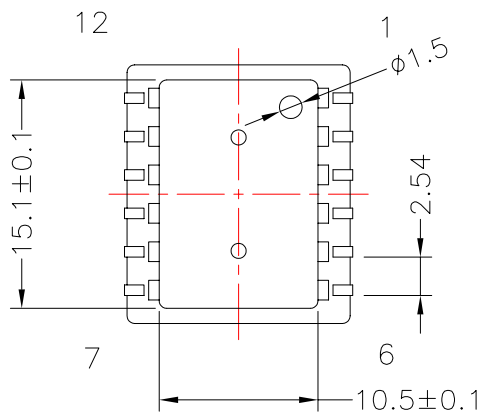

NOTE:CASE 頂部共面度為0.10 MAX.

DWG NO.	CU-12P-L-2.54-B-1				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-113-10021.103	PM-9630	PB C5191	Sn	ALL PIN(A)=15.1±0.15	
TBI-113-10021.113	PM-9630	PB C5191	Sn	ALL PIN(A)=17.65±0.15	H
TBI-113-10021.123	PM-9630	PB C5191	Sn	ALL PIN(A)=15.24±0.15	
TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05					
				UNIT : m / m	SCALE 2 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV	4
-----	---