









**TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789999
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
1		G.F.YANG	W.H.HSU	08/01/14
2		X.H.GU	G.F.YANG	08/29/14
3		X.H.GU	G.F.YANG	01/22/16

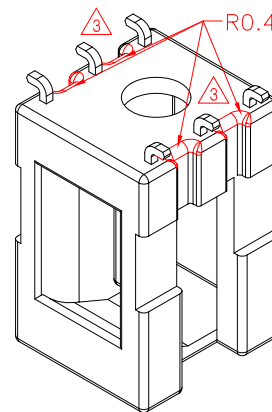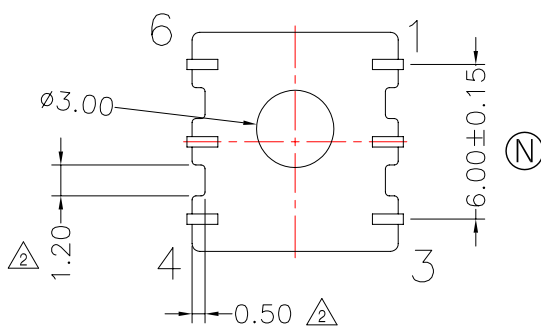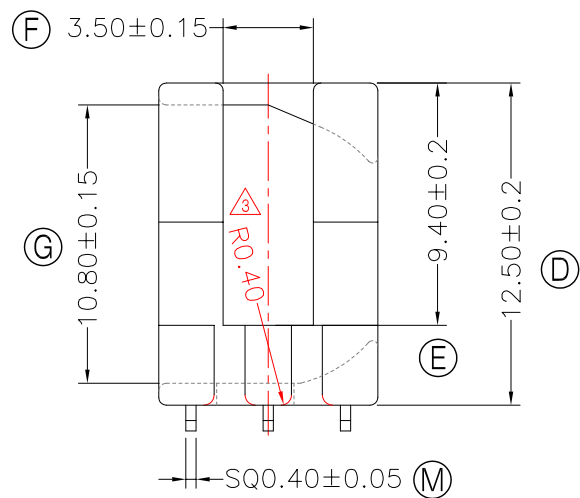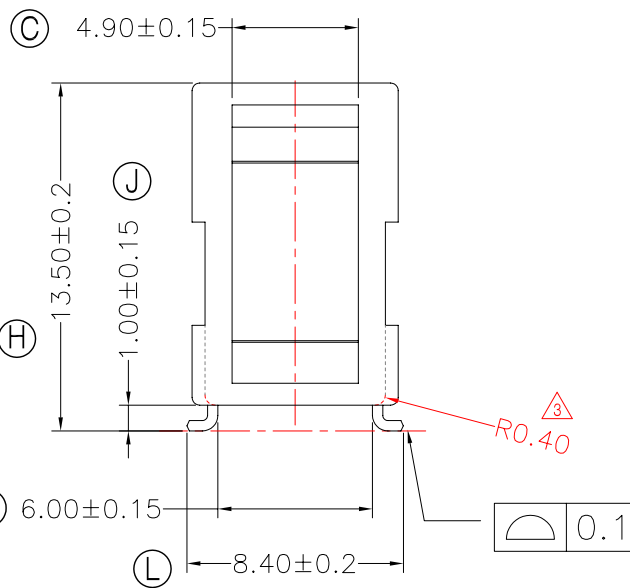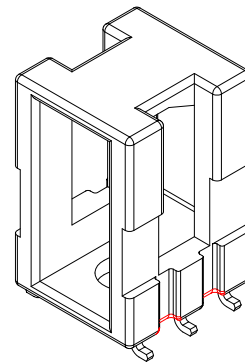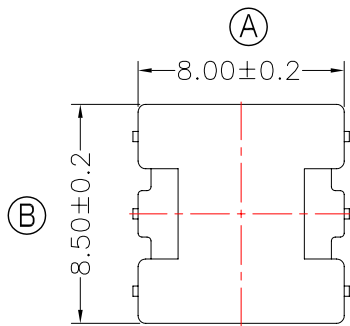

*** Pull strength of Pin : 1.0 Kg Min.
成品後需電鍍。

DWG NO.	H8X8-6P-L-C-11				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-113-47031.1103	PM-9630	PB	Sn	ALL PIN	S
					H
	TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3			UNIT : m / m	SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,Thickness:Sn plating,100,5~12.5 μm(200~500 μ inches),Base nickel 1.25~2.5 μm (50~100 μ inches),
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 3