








**TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
△1		X.H.GU	G.F.YANG	10/27/14
△2		X.H.GU	G.F.YANG	12/23/14
△3		X.H.GU	G.F.YANG	04/20/15

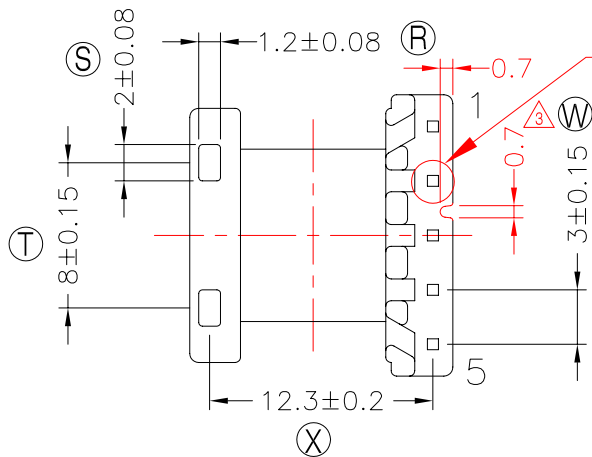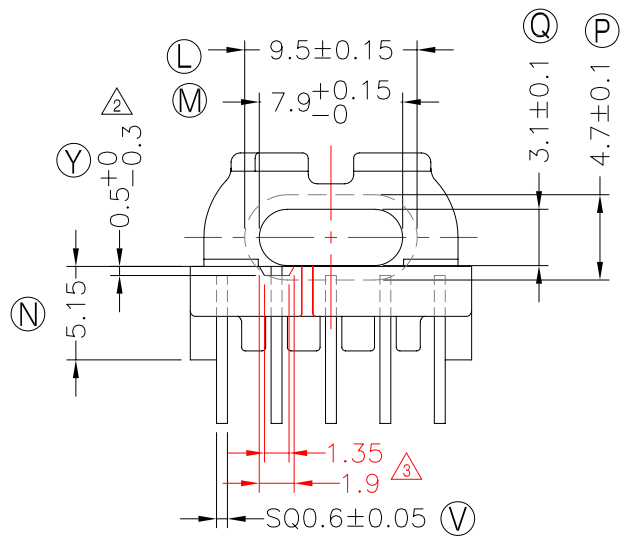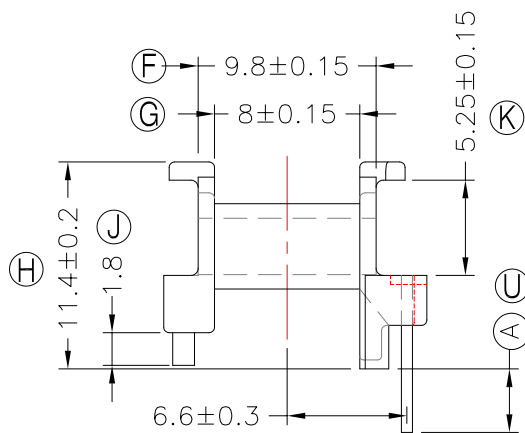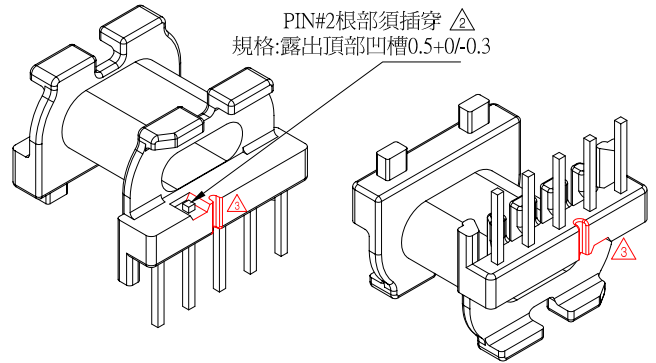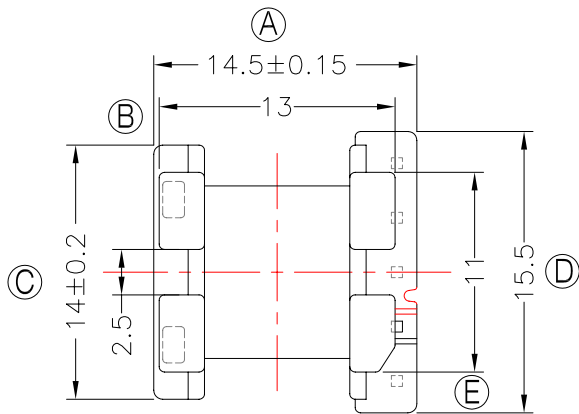

PIN#2根部須插穿

NOTE:

- 1.耐壓4.0Kv /1.5mA 60S;
- 2.焊錫溫度:450°±10° 3SEC;
- 3.任意一點強度須1.5kg MIN;
- 4.焊錫前拉力:1.0KG MIN,焊錫後拉力:1.5KG MIN;
- 5.與TBI-206-01221.12C(EPC17-15.5-CASE-B2-12)配套使用

DWG NO. EPC17-15.5-5P-TH-B2-12

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-206-01221.1206	PM-9820	CP WIRE	Sn	ALL PIN (A)=3.5±0.2	S
TBI-206-01221.1216	PM-9820	CP WIRE	Sn	NO PIN#3 (A)=3.7±0.2	H
TBI-206-01221.1226	PM-9820	CP WIRE	Sn	ALL PIN (A)=4.5±0.2	
TBI-206-01221.1236	PM-9820	CP WIRE	Sn	NO PIN#3 (A)=4.5±0.2	
TBI-206-01221.1246	PM-9820	CP WIRE	Sn	NO PIN#3 (A)=4.0±0.2	

TOLERANCE:0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3 UNIT : m / m SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 3